

»» LEDACRAFT

With the Ledacraft CT-2308 you can be sure of quality mortising results.

When efficiency, accuracy and cleanness of cut are critical demands of your mortising jobs, then the **Ledacraft CT-2308** is the obvious choice. The CT-2308 is a quality engineered, cost effective machine with a big capacity of up to 25mm mortises. The heavy cast-iron construction of the column, table, base and cross slide provides maximum stability. Specially designed for precise, trouble free and long life operations, special attention has been paid to health and safety regulations.

This machine will provide excellent mortising results when applied in woodworking plants to manufacture furniture, sashes and doors... etc.




MODEL CT-2308



MINIMUM OPERATION FATIGUE

The long operating lever controls the mortising head downfeed. It incorporates a correct counter-balance gas strut enclosed within the stand for smooth mortising operations and minimum fatigue.

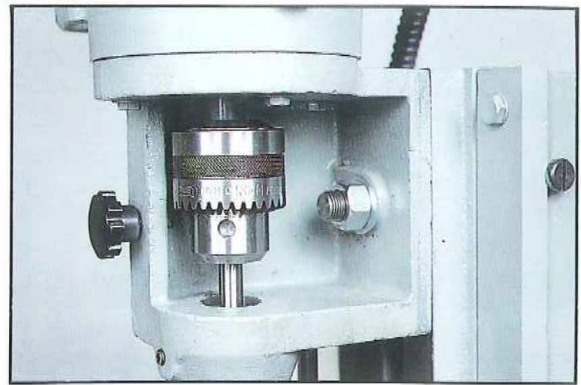

POWERFUL MORTISING CAPABILITY

The chuck is directly driven by a 1.5hp motor for powerful mortising operations. The chisel capacity is 25mm for softwood operations and 19mm for hardwood operations.




SINGLE HANDWHEEL CONTROL

The specially designed single handwheel control for both longitudinal and lateral table movements ensures convenient, accurate and fast table adjustments.



TWO POSITION CLAMP

The clamp provides fast and secure clamping operations for a variety of stock sizes.

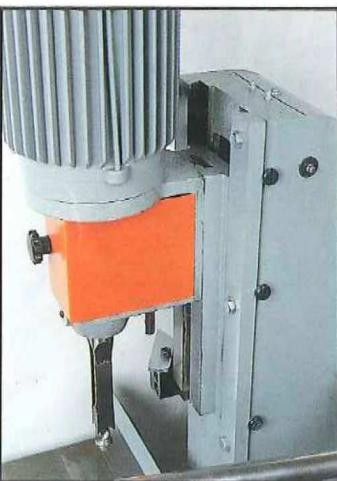


PRECISION HEAD DOWNFEED

The mortising head is manoeuvred on a dovetail slideway for precision downfeeding. The bit is driven by a 1.5hp motor with a totally enclosed fan ventilation system.

DEPTH STOP

A depth stop is provided for accurate mortising control. The starter switch features thermal overload and no volt release protection.

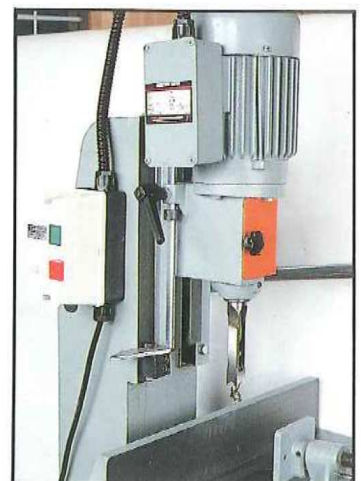

SPECIFICATIONS

CT-2308

Max. chisel size (Softwood).....	25mm.....	(1")
Max. chisel size (Hardwood).....	19mm.....	(3/4")
Timber capacity.....	225 x 180mm.....	(10" x 7")
Stroke of chisel head.....	125mm.....	(5")
Motor T.E.F.V.....	1125 W.....	HP
Longitudinal table movement.....	400mm.....	(16")
Lateral table movement.....	90mm.....	(3 1/2")

Overall Dimensions:

Length.....	520mm.....	(20.5")
Width.....	670mm.....	(26.4")
Height.....	1460mm.....	(57.5")
Net weight.....	165kgs.....	(364 lbs)
Gross weight.....	215kgs.....	(474 lbs)
Packing size (L x W x H).....	30.1" x 21.5" x 58"	(765 x 545 x 1470mm)

* All specifications and design characteristics shown in this catalogue are subject to change without notice.